
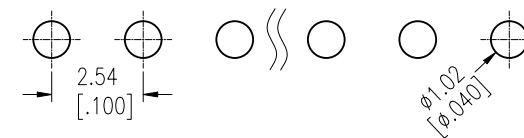


# HSF

Recommended P.C.B Layout (Top Side)  
(PCB BOARD TOLERANCE±0.05)

NOTES:  
Rated Current:3.0AMP.  
Contact Resistance:20mΩ Max.  
Withstand Voltage:1000V AC/DC  
Insulation Resistance:1000MΩ Min.  
Operation Temperature:-40°C to +105°C



Contact Material:Brass  
Contact Plating:Au or Sn Over Ni  
Insulator Material:PA9T+33%G.F UL94V-0 BK



## Ordering Information

1117-11 XX XX S XXX C 0 XX

No. of Pins 02-40	Contact Plating G0=Gold Flash G3=10u"Gold G4=15u"Gold G5=30u"Gold S0=Gold Flash/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin SN=Tin SM=Matte Tin	Pin Length L=A+B+1.7 Standard:107=10.7	Insulator Material C=PA9T D=LCP	Packing 0=PE Bag T=Tube	Series No. 01-99
----------------------	---	--	---------------------------------------	-------------------------------	---------------------

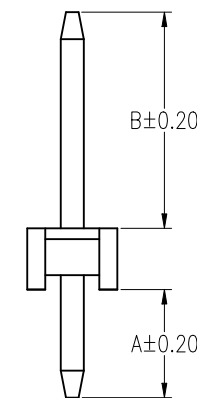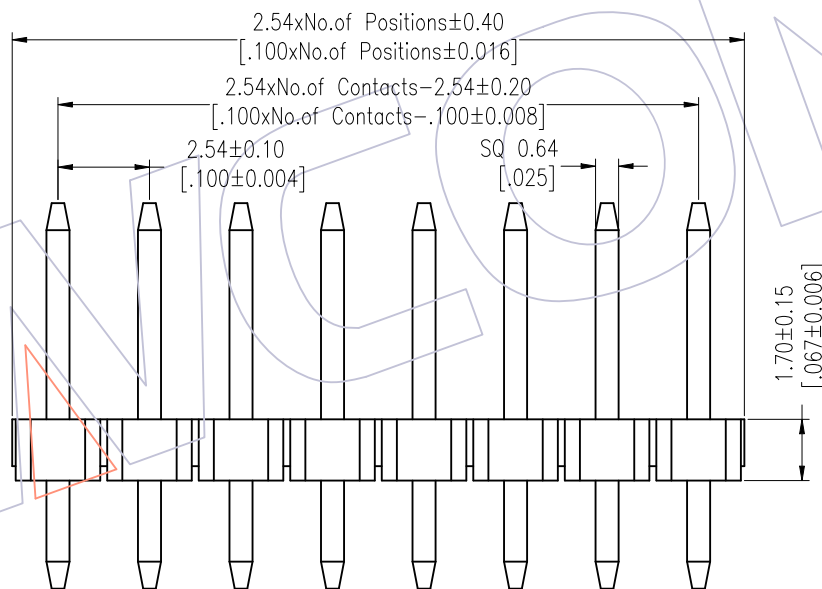

Item	Pin Length	A	B	Mating
Standard	10.70	3.00	6.00	2171 2185
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.
A1	2018/01/22	Modify P/N	△1	x.X ±0.40	Ruipeng	2018/01/22	UNIT mm		1117-11XXXXSXXXC0XX
A0	2012/05/04	NEW	-----	x.XX ±0.25	CHECK	DATE	SIZE A4		TITLE:
				x.XXX ±0.15	APPROVE	DATE	SHEET 1/1		PH2.54 SINGLE ROW 180° H=1.7
				Angle ± 3'			PROJ.		Customer NO.
				DIM TOL					

**WCON**  
Http: www.wcon.com

WCON-Dongguan      WCON-Kunshan  
Tel: +86 769 85358920      Tel: +86 512 57468408  
Fax: +86 769 85358915      Fax: +86 512 57468468  
E-mail: sales@wcon.com      E-mail: salesks@wcon.com